

# HARKEN®

## INSTALLATION SHEET

### Cam-Matic® Cam Kits

412, 420

N15W24983 Bluemound Rd, Pewaukee, WI 53072-4974


Telephone: (262) 691-3320 • Fax: (262) 701-5780

Web: [www.harken.com](http://www.harken.com) • E-mail: [harken@harken.com](mailto:harken@harken.com)


Part No. Description	Fastener Size*	Fastener Spacing	Min. Line Size	Max. Line Size	Max. Working Load
412/420 Double-wide	#10 TH 5 mm TH	2 <sup>7</sup> / <sub>16</sub> " 62 mm	5 <sup>5</sup> / <sub>16</sub> " 8 mm	3 <sup>3</sup> / <sub>8</sub> " 10 mm	500 lb 227 kg

\*Use **roundhead** screws when mounting eyestraps on cleats.  
TH=Thrushead

**DO NOT DRILL  
THROUGH CAM CLEAT**

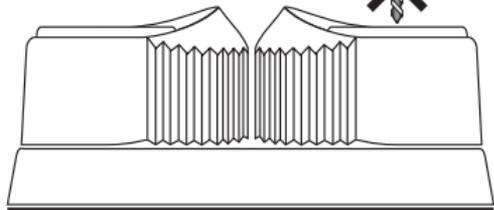

**Note: 412/420 double-wide cam cleat requires notches in 144/205 swivel arm for installation.**

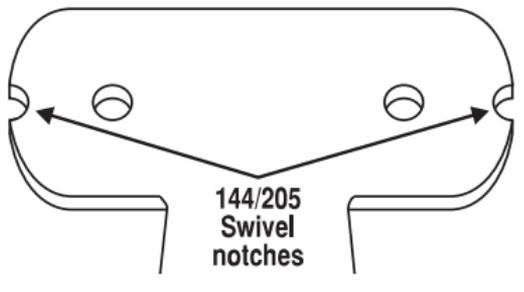

## Maintenance

**IMPORTANT!** Exposure to some teak cleaners and other caustic solutions can result in discoloration of part and is not covered under the Harken warranty. See the Harken catalog for full maintenance and warranty information.