


STAINLESS STEEL WIRE ROPE

Composed of high-tensile **ANSI 316** stainless steel that meets or exceeds BSMA 29 tolerances for nominal diameter, tensile strength, and break force thresholds. Wire rope conforms to ASTM A492 and FED-RR-W-410F.

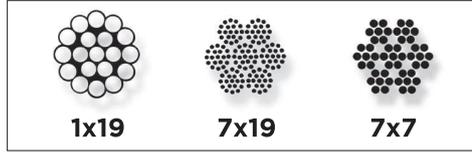

1x19 Stainless Steel Wire

Per Foot	316 SS		250' Spool	500' Spool	1,000' Spool	2,500' Spool	5,000' Spool	
Part #	Wire Diameter	Strand	Part #	Part #	Part #	Part #	Part #	N.B.S. lbs
SC06219	1/16"	1 x 19	SC0621925	SC0621950	SC062191M	-	SC062195M	445
SC09319	3/32"	1 x 19	SC0931925	SC0931950	-	-	-	1,068
SC12519	1/8"	1 x 19	SC1251925	SC1251950	SC125191M	SC125192M	SC125195M	1,869
SC15619	5/32"	1 x 19	SC1561925	SC1561950	SC156191M	SC156192M	SC156195M	2,937
SC18819	3/16"	1 x 19	SC1881925	SC1881950	SC188191M	SC188192M	SC188195M	4,183
SC21819	7/32"	1 x 19	SC2181925	SC2181950	SC218191M	-	-	5,607
SC25019	1/4"	1 x 19	SC2501925	SC2501950	SC250191M	-	SC250195M	7,298
SC28119	9/32"	1 x 19	SC2811925	SC2811950	SC281191M	-	-	9,261
SC31219	5/16"	1 x 19	SC3121925	SC3121950	-	-	-	11,125
SC37519	3/8"	1 x 19	SC3751925	SC3751950	-	-	-	15,575
SC43719	7/16"	1 x 19	SC4371925	SC4371950	-	-	-	20,025
SC50019	1/2"	1 x 19	SC5001925	SC5001950	-	-	-	25,116
SC56219	9/16"	1 x 19	-	-	-	-	-	28,649
SC62519	5/8"	1 x 19	-	-	-	-	-	45,194


7x19 & 7x7 Stainless Steel Wire

Per Foot	316 SS		250' Spool	500' Spool	1,000' Spool	2,500' Spool	5,000' Spool	
Part #	Wire Diameter	Strand	Part #	Part #	Part #	Part #	Part #	N.B.S. lbs
SC06279	1/16"	7 x 19	SC0627925	-	-	-	-	-
SC09379	3/32"	7 x 19	SC0937925	SC0937950	-	-	-	700
SC12579	1/8"	7 x 19	SC1257925	SC1257950	SC125791M	SC125792M	SC125795M	1,328
SC15679	5/32"	7 x 19	SC1567925	SC1567950	SC156791M	SC156792M	SC156795M	2,074
SC18879	3/16"	7 x 19	SC1887925	SC1887950	SC188791M	SC188792M	SC188795M	2,963
SC21879	7/32"	7 x 19	-	-	-	-	-	4,056
SC25079	1/4"	7 x 19	SC2507925	SC2507950	-	SC250792M	-	5,308
SC31279	5/16"	7 x 19	-	-	-	-	-	8,290
SC37579	3/8"	7 x 19	SC3757925	-	-	-	-	11,951
SC50079	1/2"	7 x 19	-	-	-	-	-	-
SC06277	1/16"	7 x 7	-	-	-	-	-	335
SC09377	3/32"	7 x 7	SC0937725	SC0937750	-	-	-	806
SC12577	1/8"	7 x 7	SC1257725	SC1257750	SC125771M	SC125772M	SC125775M	1,434
SC15677	5/32"	7 x 7	SC1567725	SC1567750	SC156771M	SC156772M	SC156775M	2,211
SC18877	3/16"	7 x 7	SC1887725	SC1887750	SC188771M	SC188772M	SC188775M	3,218
SC25077	1/4"	7 x 7	SC2507725	SC2507750	-	-	SC250775M	5,728
SC31277	5/16"	7 x 7	SC3127725	-	-	-	-	8,090
SC37577	3/8"	7 x 7	SC3757725	-	-	-	-	11,494

Vinyl Coated - 7x7 Stainless Steel Wire

Per Foot	316 SS		250' Spool	500' Spool	1,000' Spool	2,500' Spool	5,000' Spool	
Part #	Wire Diameter	Strand	Part #	N.B.S. lbs				
LLC11618W	1/16" (1/8" White)	7 x 7	LLC11618W25	LLC11618W50	-	-	-	335
LLC332532W	3/32" (5/32" White)	7 x 7	LLC332532W25	LLC332532W50	-	-	-	806
LLC18732W	1/8" (7/32" White)	7 x 7	LLC18732W25	LLC18732W50	-	-	-	1,434
LLC18732C	1/8" (7/32" Clear)	7 x 7	-	-	-	-	-	1,434
LLC532732W	5/32" (7/32" White)	7 x 7	LLC532732W25	LLC532732W50	-	-	-	2,211
LLC316516W	3/16" (5/16" White)	7 x 7	LLC316516W25	LLC316516W50	-	-	-	3,218
LLC316516B	3/16" (5/16" Black)	7 x 7	-	-	-	-	-	3,218
LLC316516C	3/16" (5/16" Clear)	7 x 7	-	-	-	-	-	3,218
LLC1438W	1/4" (3/8" White)	7 x 7	LLC1438W25	LLC1438W50	-	-	-	5,728

STAINLESS STEEL WIRE ROPE (CONTINUED)

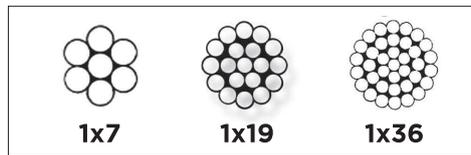

Metric 1x19 Stainless Steel Wire

Per Foot 316 SS

Part #	Wire Diameter	Strand	N.B.S. lbs
SCM0419	4mm	1 x 19	2,965
SCM0519	5mm	1 x 19	4,631
SCM0619	6mm	1 x 19	6,671
SCM0719	7mm	1 x 19	9,078
SCM0819	8mm	1 x 19	11,858
SCM1019	10mm	1 x 19	18,527
SCM1219	12mm	1 x 19	26,680
SCM1419	14mm	1 x 19	36,316
SCM1619	16mm	1 x 19	45,194

Compact Strand Stainless Steel Wire

Per Foot 316 SS 250' Spool 500' Spool

Part #	Wire Diameter	Strand	Part #	Part #	N.B.S. lbs
SCM0317CS	3mm	1 x 7	SCM0317CS25	SCM0317CS50	2,205
SCM0417CS	4mm	1 x 7	SCM0417CS25	SCM0417CS50	3,924
SCM0519CS	5mm	1 x 19	SCM0519CS25	SCM0519CS50	5,379
SCM0619CS	6mm	1 x 19	SCM0619CS25	SCM0619CS50	7,826
SCM0719CS	7mm	1 x 19	SCM0719CS25	SCM0719CS50	10,825
SCM0819CS	8mm	1 x 19	SCM0819CS25	SCM0819CS50	13,558
SCM1019CS	10mm	1 x 19	SCM1019CS25	SCM1019CS50	21,539
SCM1219CS	12mm	1 x 19	SCM1219CS25	SCM1219CS50	31,747
SCM1436CS	14mm	1 x 36	-	-	42,215
SCM1636CS	16mm	1 x 36	-	-	56,395
SCM1936CS	19mm	1 x 36	-	-	79,525

Manufacturer certifications available upon request.

N.B.S. - Nominal Break Strength / lbs

All Hayn **rigging hardware** is engineered to exceed the breaking strength of 1x19 ANSI 316 stainless steel wire rope in it's corresponding wire size. However, a maximum of 40% of the amounts listed in the above tables should not be exceeded. Consult your engineer for the applicable safe working load for your application.



All Hayn **lifeline hardware** is engineered to exceed the breaking strength of 7x7 ANSI 316 stainless steel wire rope in it's corresponding wire size. However, a maximum of 40% of the amounts listed in the above tables should not be exceeded. Consult your engineer for the applicable safe working load for your application.

